


IBM CORPORATION

PC/AT MODEL 5170-239

| | |
|--------------------------|---------------|
| Processor | 80286 |
| Processor Speed | 6MHz |
| Chip Set | None |
| Max. Onboard DRAM | 512KB |
| Cache | None |
| BIOS | IBM |
| Dimensions | 355mm x 304mm |
| I/O Options | None |
| NPU Options | 80287 |

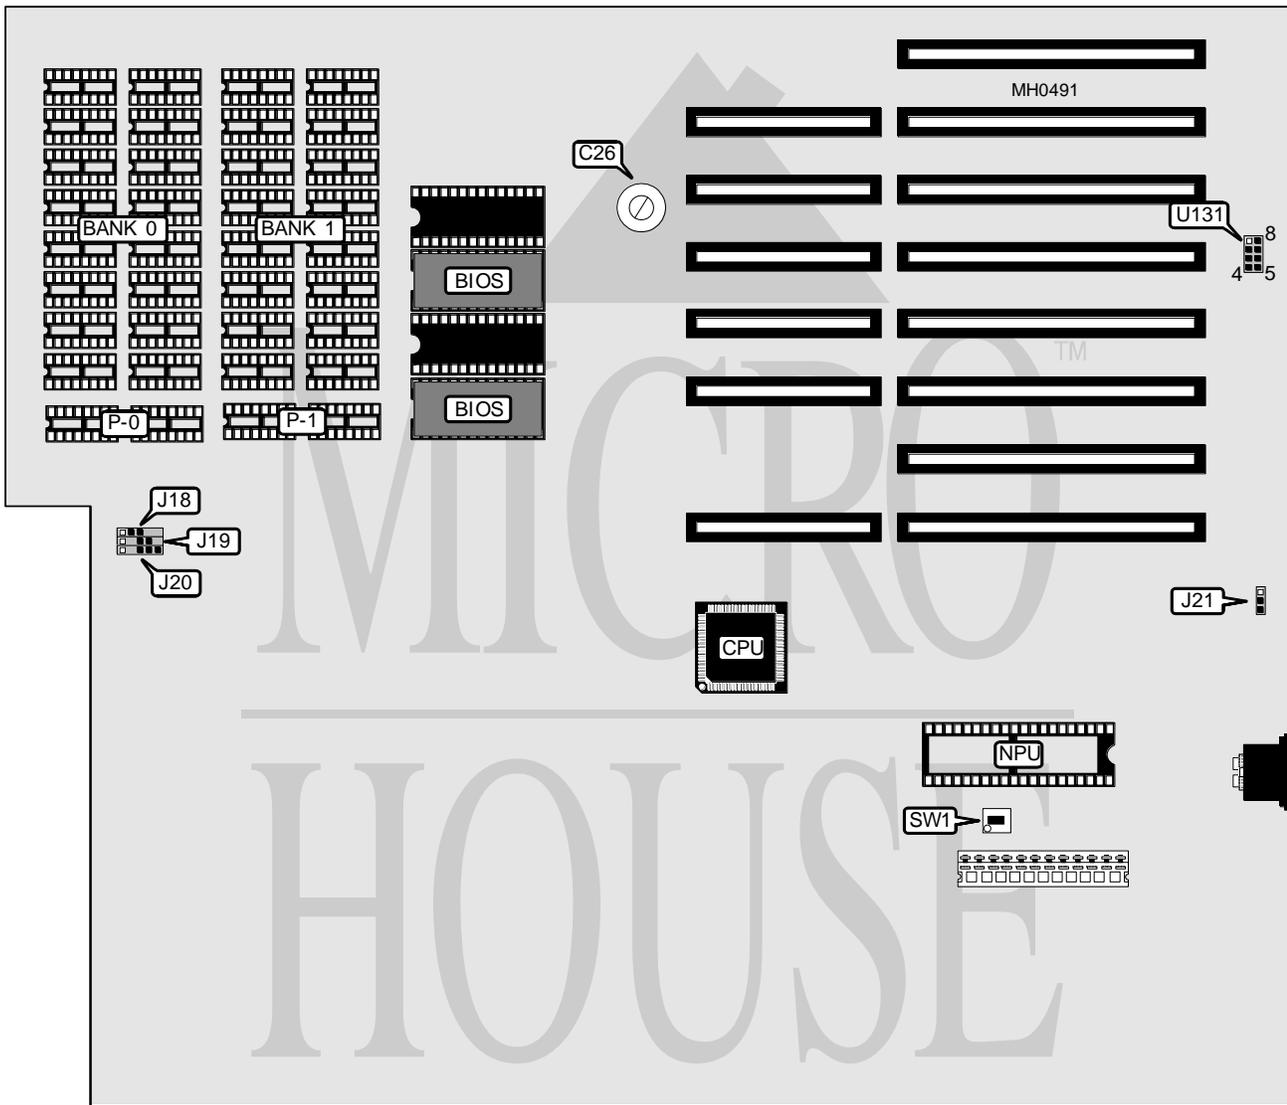

CONNECTIONS

| Purpose | Location | Purpose | Location |
|---------------------|----------|------------------|----------|
| Speaker | J19 | External battery | J21 |
| Power LED & keylock | J20 | | |

Continued on next page . . .

IBM CORPORATION

PC/AT MODEL 5170-239

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|--|---------------|----------|
| Function | Jumper/Switch | Position |
| í 14MHz adjust | C26 | N/A |
| í Monitor type select color | SW1 | On |
| í Monitor type select monochrome | SW1 | Off |
| Note: Variable resistor C26 should not be altered except by competently trained technicians. | | |

| DRAM CONFIGURATION | | | | |
|--------------------|---------------|--------------|---------------|--------------|
| Size | Bank 0 | P-0 | Bank 1 | P-0 |
| 256KB | (16) ZA1250NL | (2) ZA1250NL | NONE | NONE |
| 512KB | (16) ZA1250NL | (2) ZA1250NL | (16) ZA1250NL | (2) ZA1250NL |

| DRAM JUMPER CONFIGURATION | |
|---------------------------|-------------------|
| Size | J18 |
| 256KB | pins 1 & 2 closed |
| 512KB | pins 2 & 3 closed |

| BIOS CONFIGURATION | |
|--------------------|--------------------------|
| Size | U131 |
| 2716 | pins 1 & 8, 2 & 7 closed |
| 2732 | pins 3 & 6, 4 & 5 closed |